

CW68-E250N 00000000 000000 000000 00 000000 00000000

00000000 000000 0000 000000 000000 0000 000000000000 00000000 00000000 00000000-000000-000000000000-000000
000000 0000 00 00000000 00 0000 00000000 000000 00000000000000 0000 0000 .000000 00000000 00000000 000000 0000
0000000000 000000 00000000000000 0000 000000 00 000000 0000 0000 0000 0000 000000000000 000000 00000000000000 000000
0000 .000000 00000 0000 00000000 000000 0000 00000000 00000000 000000 00000000000000 000000 000000 00000000000000
00000000 0000 00 00000000 000000 000000 000000 000000 000000 000000 00000000000000 000000 000000 00000000000000
.0000000000 00000000 000000 000000000000 000000 00000000 0000 00 00000000 000000 000000000000 00000000 0000 000000



RECEIVER BUILT-IN CHAIN WINDOW OPENER

STRUCTURE EXPLANATION



DIMENSIONS





CENTER PIVOTED WINDOW




HOPPER WINDOW

Wide voltage 100-240V AC power supply. Apply to windows are mounted in high position, where people hard to reach. This model does not need extra receiver; It could be single controlled or group controlled directly by wireless remote and it is also compatible with smart home device that allows both local and remote control by smart phone or tablet computer.

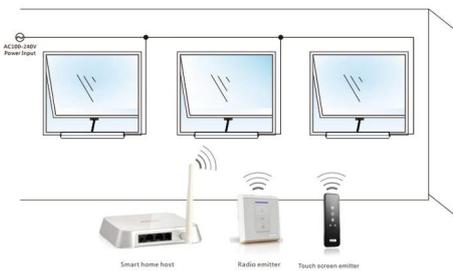


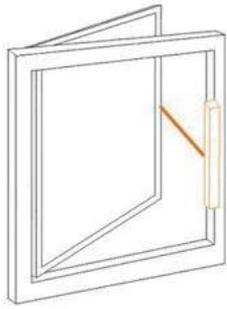


Casement Window (Left)

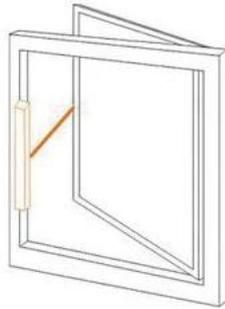

Casement Window (Right)

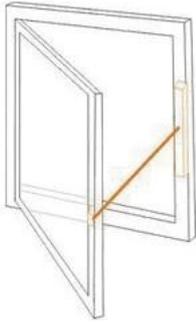

Casement Window Opening Inwards

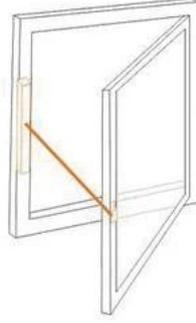

Casement Window Opening Inwards




Top-hinged Out-swinging Window



Top-hinged In-swinging Window



Hopper Window

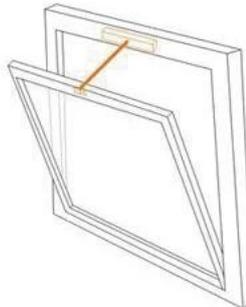

Horizontal Pivoting Window



