



Wireless charging RX-Module




Protection: Overcurrent, Overvoltage, Overtemperature

RX Output Voltage: $42V \pm 0.2V$

RX Output Current: 2.5A

Lock hole

Bottom shell hardware
Face shell plastic

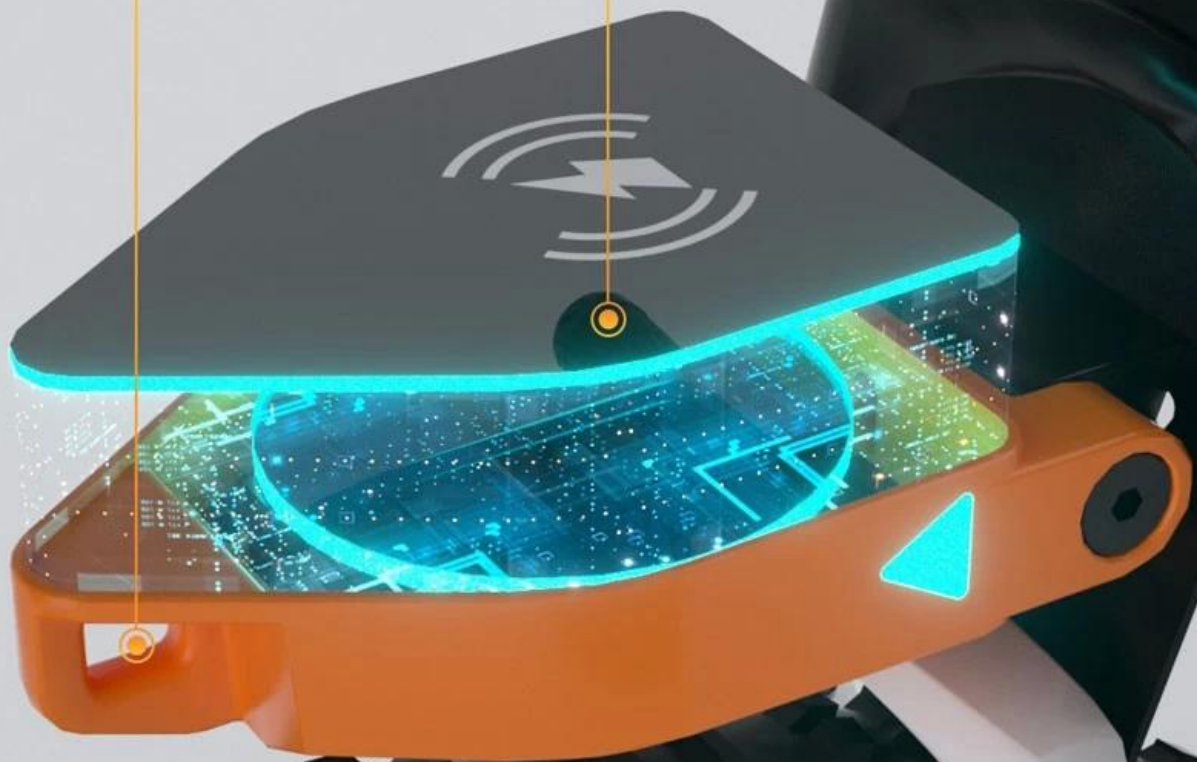


Wireless charging TX-Module



Heat dissipation: Aluminum heat sink, natural cooling

TX input voltage: 48V/DC \pm 2V

TX input current: <3A

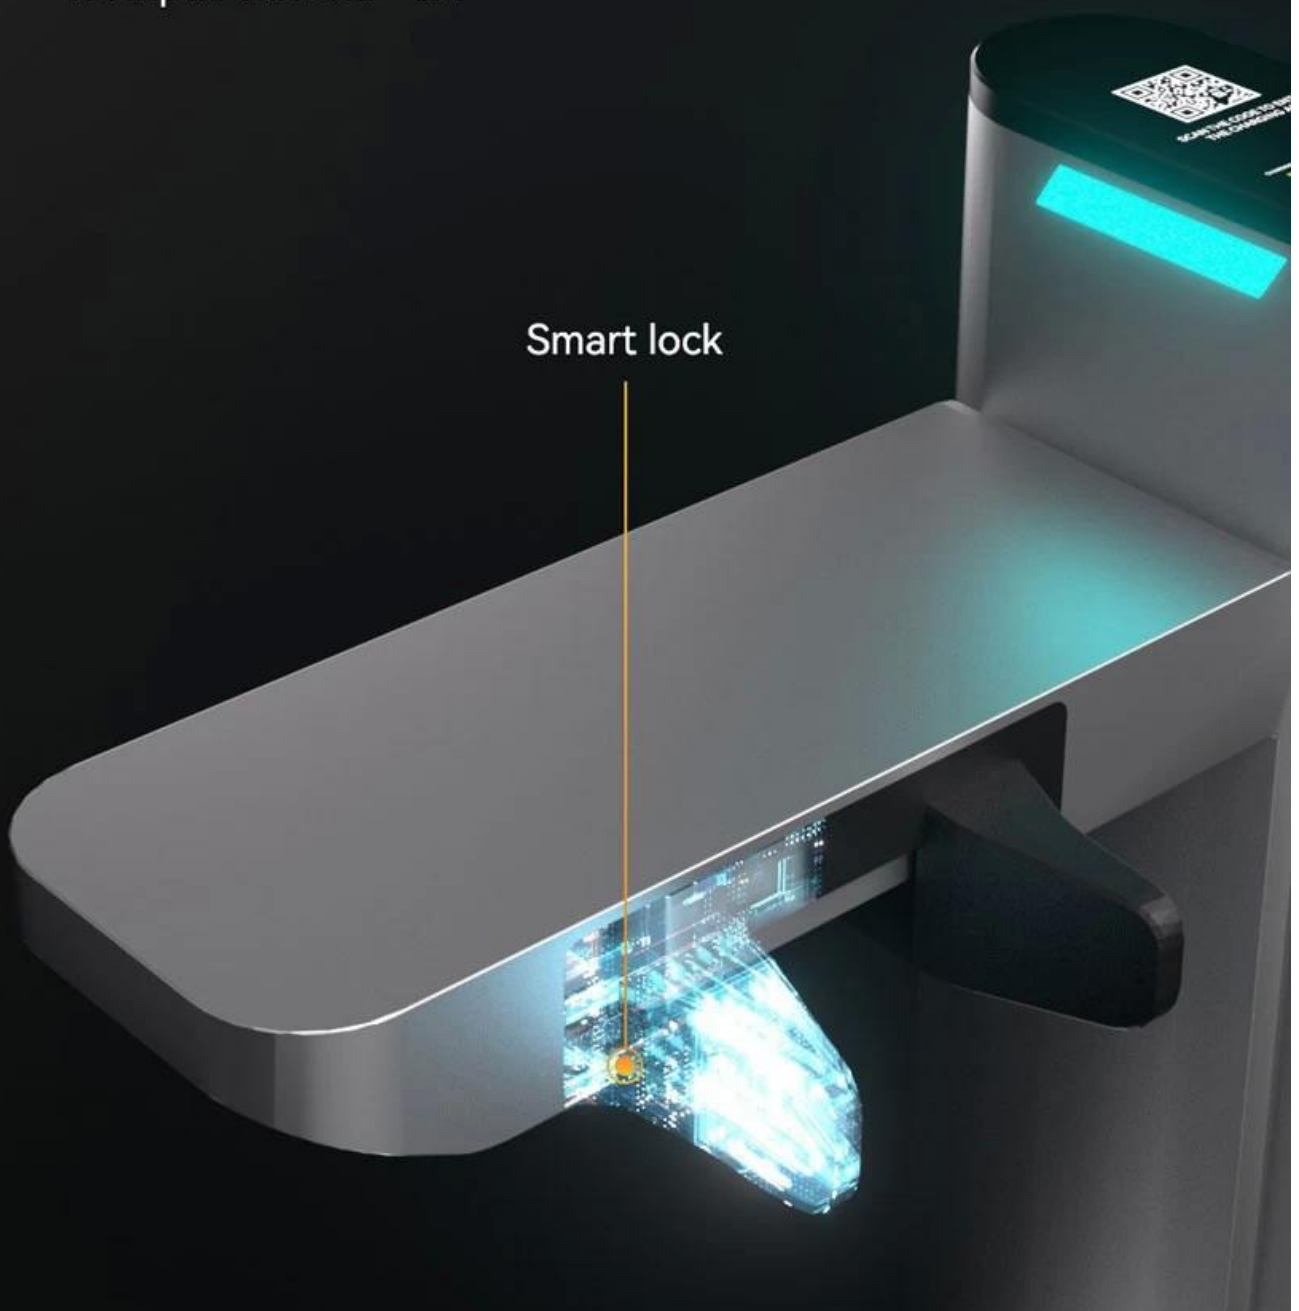

Omni Sharing APP ^{3.0}



Customize vehicle battery filter

Vehicle position integration

Available charging ports

Charging station data

← CHARGING ⋮ ⌂



Electricity Consumption
2 kWh

#1-2 Underground charging station in Building 31 of Lianchuang Technology Building


9.35 Voltage (V)	19.35 Current (A)	29.35 Power (W)
---------------------	----------------------	--------------------

29.35
Cumulative cost (dollars)


26 min
Charging time

STOP CHARGING

← Charging Station Map ⋮ ⌂

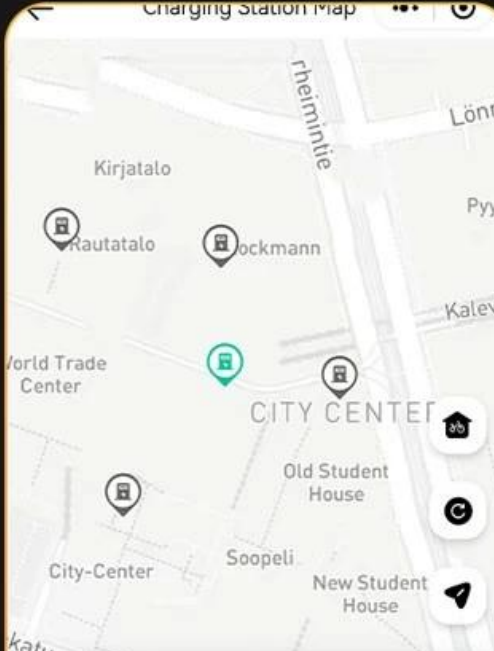

Parking 18/20



Underground charging station at Block 31 of Lianchuang Technology Building

In business
08:00-24:00

No. 291, Bubull Road, Longgang District, Shenzhen, Guangdong Province, near the west side of the downstairs of the Lianchuang Science and Technology Building

36m from you

View Details

Postitalo