CW68-E250N [illegible]

[illegible]

RECEIVER BUILT-IN CHAIN WINDOW OPENER

STRUCTURE EXPLANATION

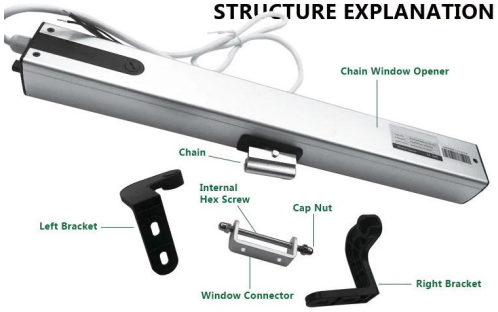

DIMENSIONS

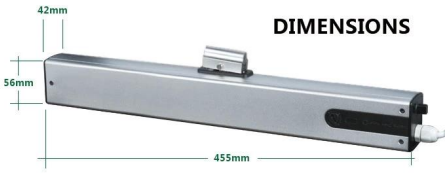

Wide voltage 100-240V AC power supply; Apply to windows are mounted in high position, where people hard to reach. This model does not need extra receiver; It could be single controlled or group controlled directly by wireless remote and it is also compatible with smart home device that allows both local and remote control by smart phone or tablet computer.

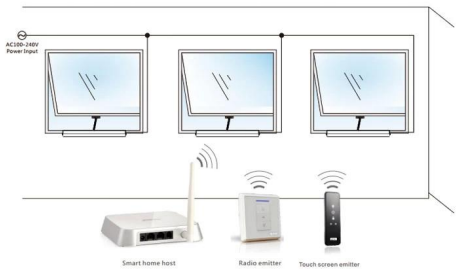



Casement Window (Left)



Casement Window (Right)



Casement Window Opening Inwards



Casement Window Opening Inwards

Top-hinged Out-swinging Window

Top-hinged In-swinging Window

Hopper Window



Horizontal Pivoting Window

Features

240-100 □□□□□ □□□□□ .1V .□□□□□□□□□ □□□□□□ □□□□□ □□□□□ □□□□□□□ □□□□□□□ □□□□□□ □□
400 □□□ □□□ □□ □□□□ □□□□□□ □□□□ .□□□□□ □□□□ □□□ □□□□ □□ □□□□□□ □□□ .2mm .□□□□□□□□□ □□□□□□
470 □□□□□□□ □□□ □□□□□ □□□□□□ □□□□□ □□□□□ □□□ □□□□□ .3mm.
4. .□□□□□□□□□ □□□□□□ □□□□□ □□□□□□□□ □□□□□ □□□ □□□□□□□ □□□□
.□□□□□□□ □□□□□□□ □□ □□□□□ □□□□□□ □□□□□□□□□□□□ □□□□□□□ □□□□ □□□□□ .5
.□□□□□□ □□□ □□□□ 10000 □□ □□□□ □□□□□□□ □□ □□□□□□□ □□□□□□ .6
.□□□□□ □□□□□ □□□□□□ □□□□ .□□□□□ □□□□□□□ □□□□□□□ □□□□□□ □□□□□ □□□□□□□ □□□□□□ □□□□□ .7
.□□□□ □□□□ □□□□□ □□□□□ □□ □□□□□□□□ □□□□□□□ .□□□□□□ □□□□□□□□ □□□□□ □□ □□□□□ □□□□□□□□□□ .8
□□□□□ □□□□□ □□□□ □□□□□□ □□□ □□□□□□ □□□□ □□□ □ □□□□□□□□ □□□ □□□□□ □□□ □□ □□□□□ .9
□□□□□□ □□□□□□□ □□□□ .10.

Parameters

□□□ □□□□□:	□□□□□□□□	□□□ / □□□ □□□□□	□□□□	□□□□□ □□□□	□□□□□ □□□□□	□□□□□ □□□□□□□	□□□□	□□□□	□□□ □□
CW68-E250N / 400MM	100-240VAC	250N / 250N	10MM / □□□□□	100 ~ 400MM	0.47 ~ 1.5M	28W	-20 ℃ ~ + 75 ℃	460 * 42 * 55MM	IP43