[illegible]

[illegible] [illegible] [illegible] [

SCAN THE COOE TO ENTER
THE CHARGING APP
CHARGING PORT 1
IN USE
CHARGING PORT 2
AT LEISURE

Wireless charging RX-Module

Protection: Overcurrent, Overvoltage, Overtemperature

RX Output Voltage: 42V ±0.2V

RX Output Current: 2.5A

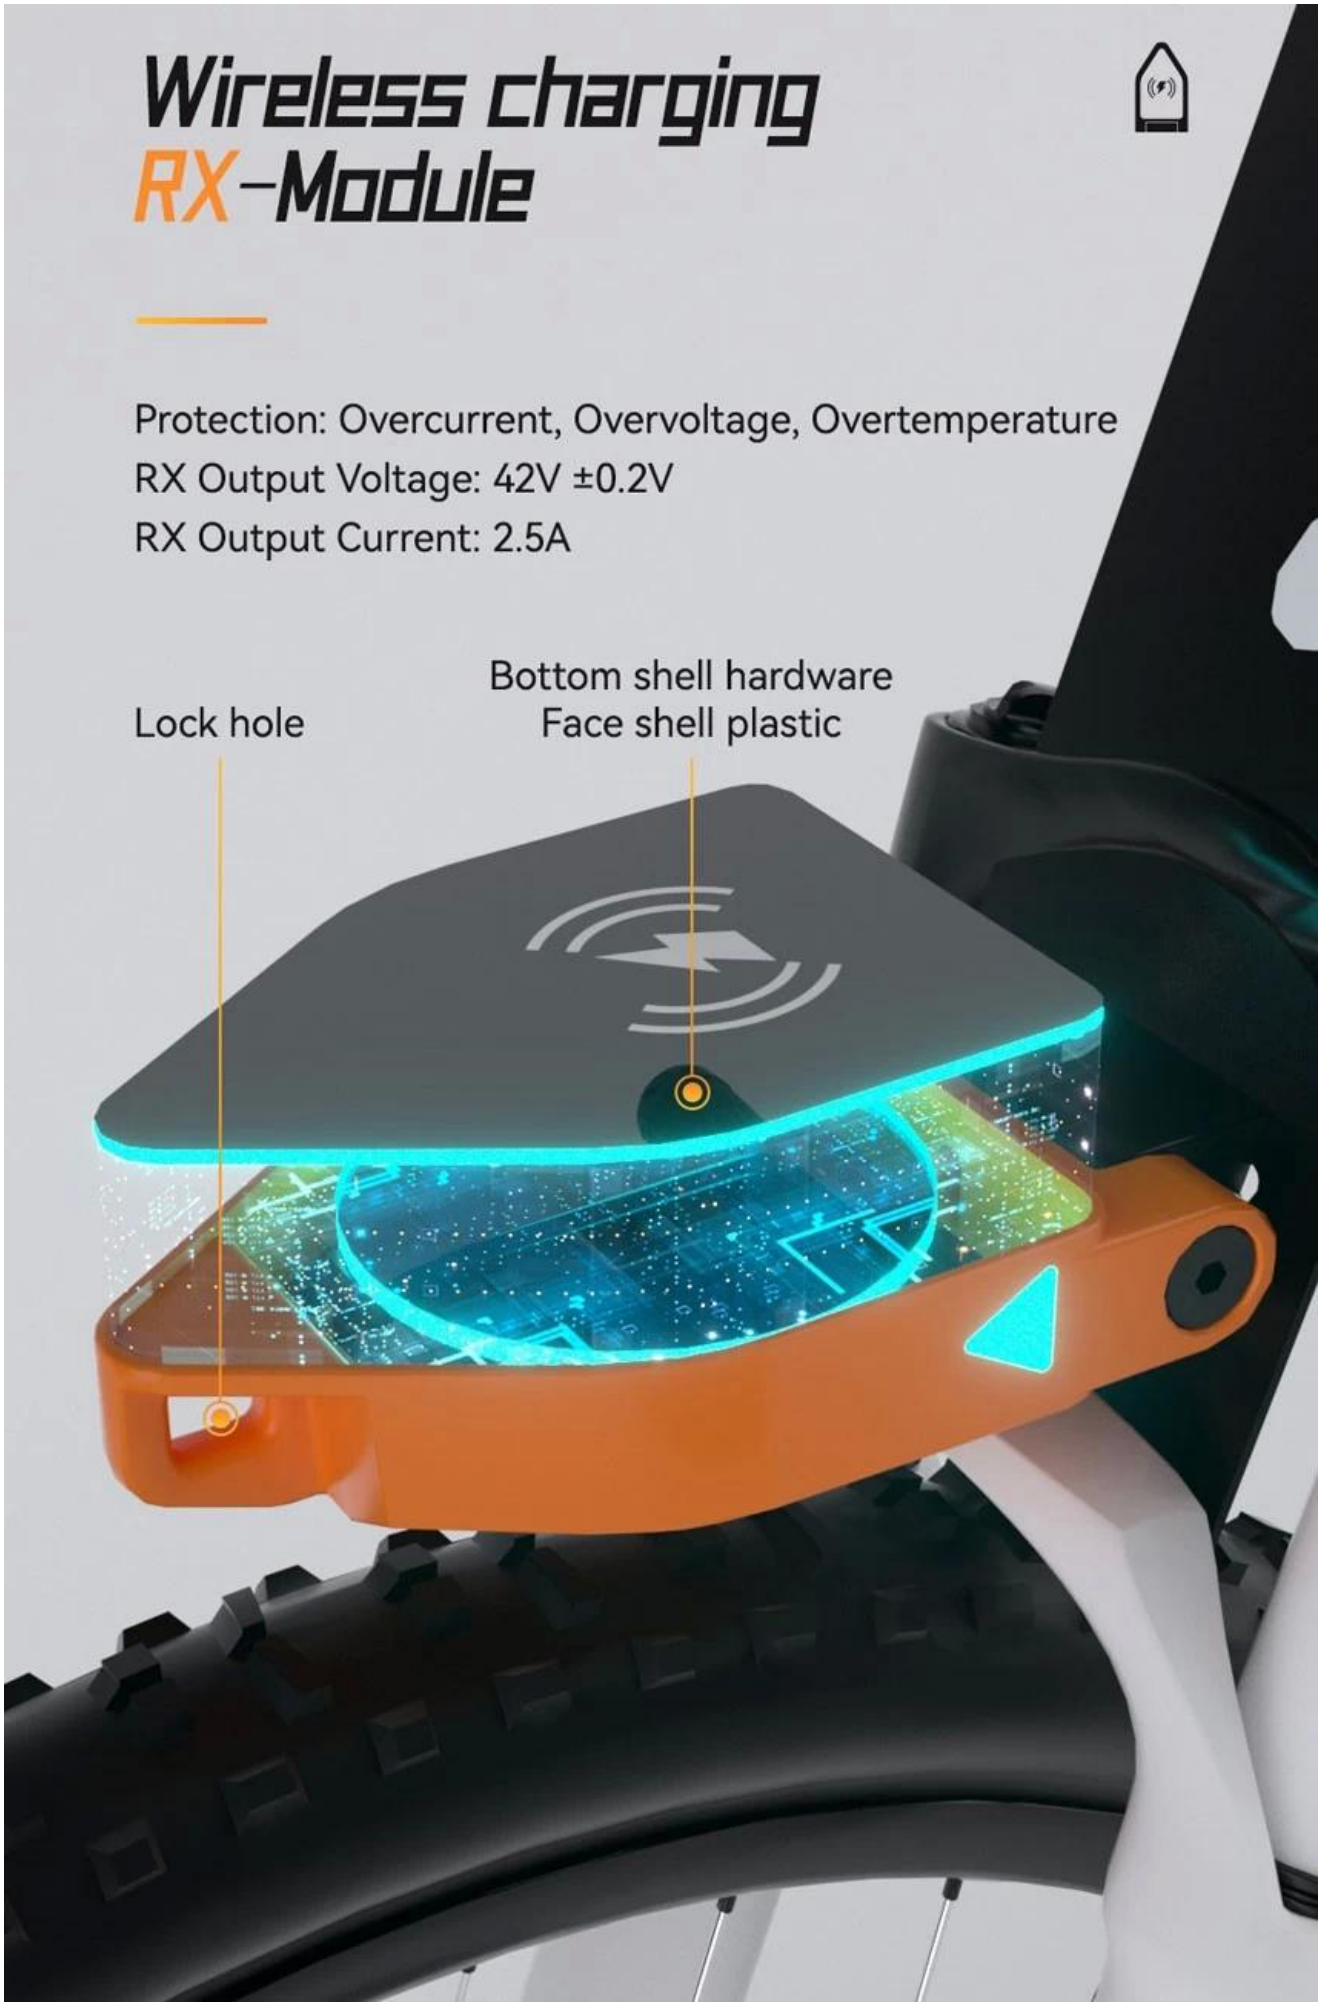

Wireless charging TX-Module

Heat dissipation: Aluminum heat sink, natural cooling
TX input voltage: 48V/DC ±2V
TX input current: <3A

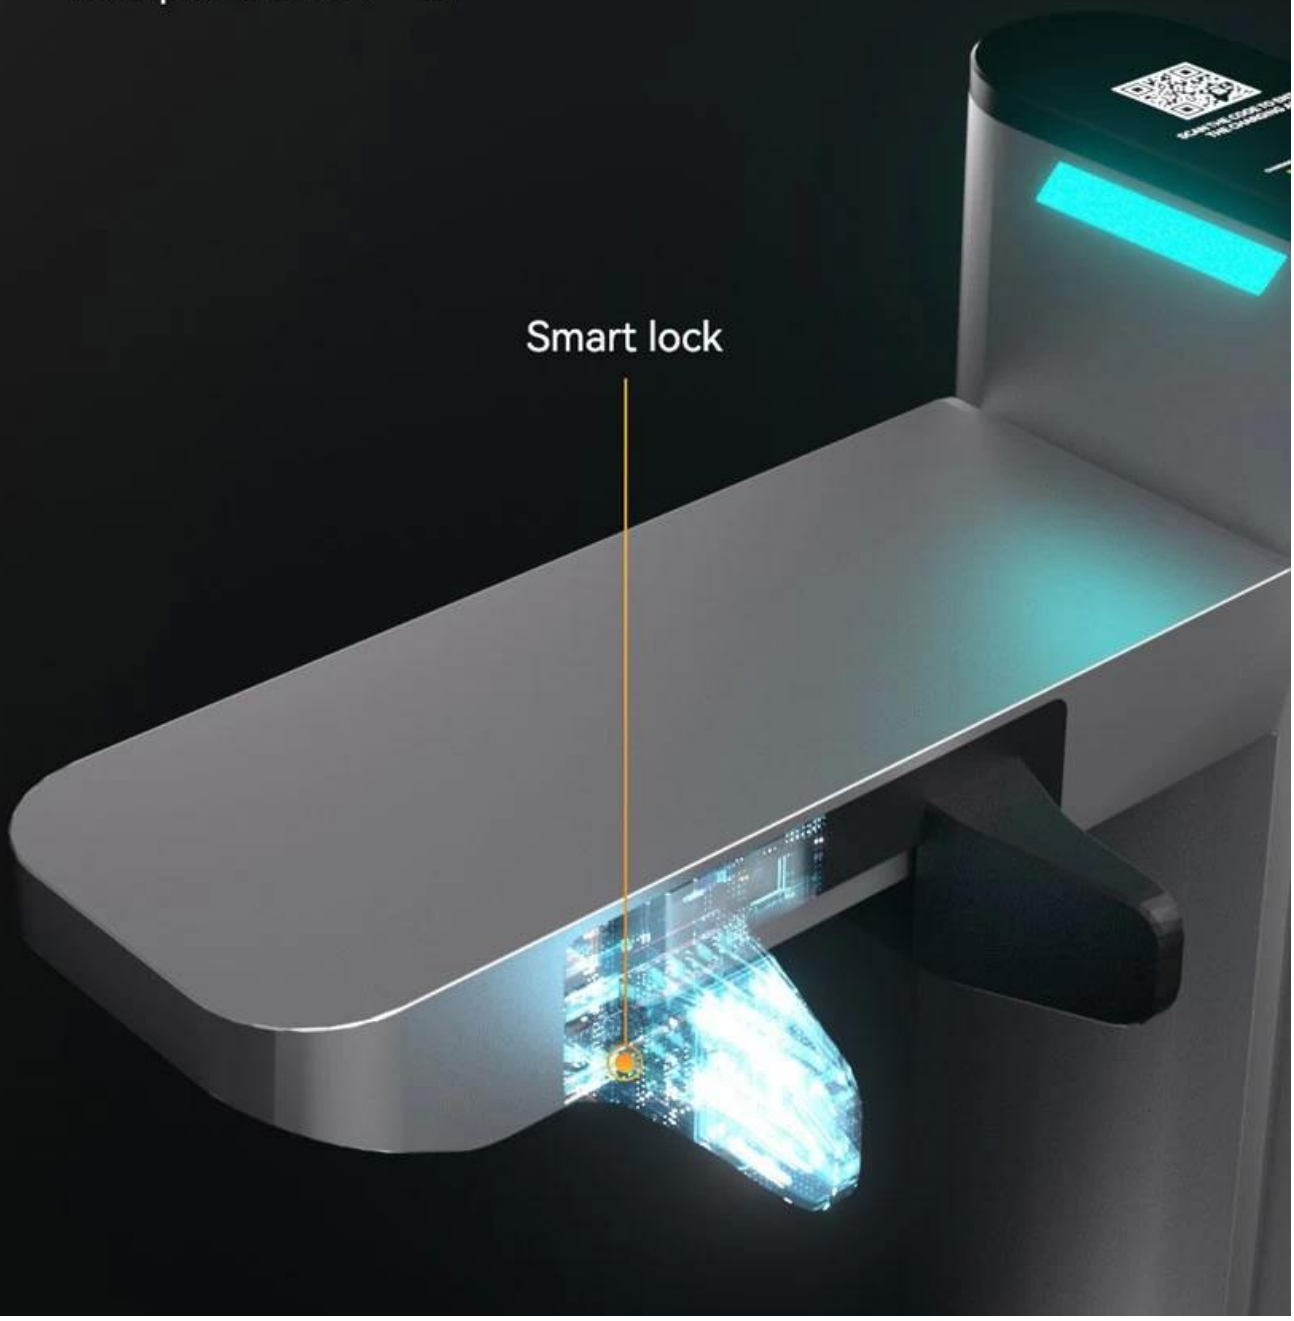

Omni Sharing APP 3.0
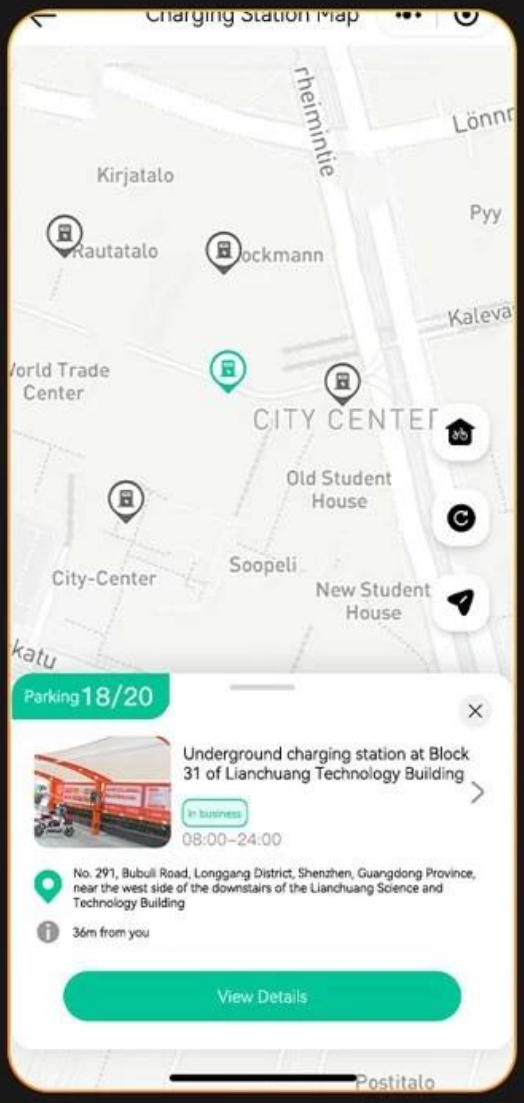
- Customize vehicle battery filter
- Vehicle position integration
- Available charging ports
- Charging station data