CW68 apri finestra della CC

Catena di catena elettrica a catena è con protezione elettronica di sovraccarico di controllo elettronico, dispositivo è realizzato in acciaio di alta qualità, materiale esterno è lega di alluminio di buona qualità. Nostro apri finestra elettrica è particolarmente utilizzato l'alloggiamento nella parte superiore dell'apertura e della chiusura della finestra.

DC WINDOW OPENER

STRUCTURE EXPLANATION

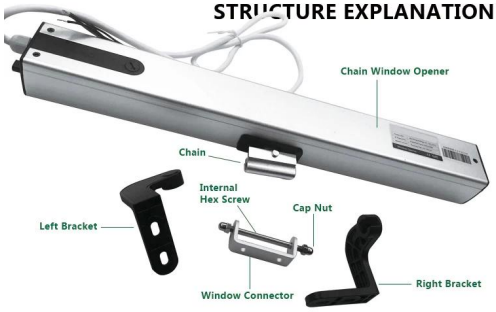

DIMENSIONS

DC24V power supply, mainly applied to the windows are mounted in high position, where people hard to operate. Safety voltage applied for building fire certification. It is popular installed in many famous commercial buildings for ventilation and security.





Casement Window (Left)



Casement Window (Right)



Casement Window Opening Inwards



Casement Window Opening Inwards

Top-hinged Out-swinging Window

Top-hinged In-swinging Window

Hopper Window



Horizontal Pivoting Window

1.Elegant design with quality surface finishing.
2.24V DC electricity supplying.
3.Adjust the journey by adjusting knob, Convenient and quick.
4.Two flame resistance ABS holders and the POM sliding guide make the motor more silent and safer.
5.Automatically stop on physical obstruction; protect the motor and the user.
6.SMT assembly, damp-proof on surface.

Parameters

Modello numero:	Tensione nominale	Corrente di lavoro	Velocità	Running Trip	Push / Pull Force	Temp	Dimensione	Classe IP
CW68-D250N / 400 millimetri	DC24V	40W	10mm / s	100 ~ 400 millimetri	250N	-20 ℃ ~ + 60 ℃	460 * 42 * 56 millimetri	IP42