


# CW68-E250N 000 00 00 000 000

00-00-0-000 00 000 0000 000 00 000 00 0000 000 00 00 00 0 0000. 00 00 000 00 00 00 00000 00 00 000 0000  
00 00 0, 00 00 0, 00 00 0, 00 000 00 00 0000 00 0 000 00 00000 00 000 0 0000. 00 000 00 000-000-00 00 000 00  
00 00 00000 0000 00 00 00, 00 00 00 0 000 00 00 0 000 00 0 0 0000.



### RECEIVER BUILT-IN CHAIN WINDOW OPENER

### STRUCTURE EXPLANATION

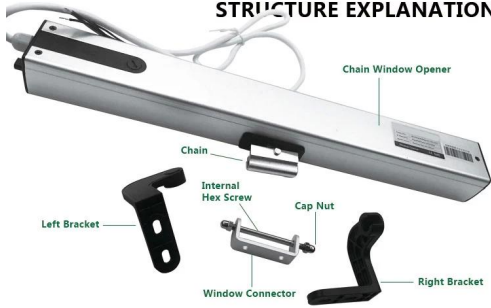

### DIMENSIONS




CENTER PIVOTED WINDOW




HOPPER WINDOW


Wide voltage 100-240V AC power supply. Apply to windows are mounted in high position, where people hard to reach. This model does not need extra receiver; It could be single controlled or group controlled directly by wireless remote and it is also compatible with smart home device that allows both local and remote control by smart phone or tablet computer.

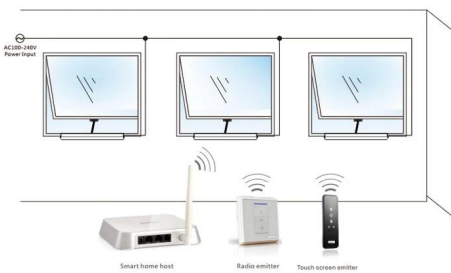







**Casement Window (Left)**



**Casement Window (Right)**



**Casement Window Opening Inwards**



**Casement Window Opening Inwards**




**Top-hinged Out-swinging Window**



**Top-hinged In-swinging Window**



**Hopper Window**



**Horizontal Pivoting Window**



## Features

1. 100-240V AC 100%.
2. 400mm 400mm.
3. 470mm.
4. 100%.
5. 100%.
6. 10000.
7. 100%.
8. 100%.
9. 2 ABS POM.
10. 100%.

## Parameters

Model	Voltage	Force / Speed	Stroke	Stroke Range	Stroke Time	Power	Temperature	Dimensions	IP Rating
CW68-E250N / 400mm	100-240VAC	250N / 250N	10mm / s	100 ~ 400mm	0.47 ~ 1.5m	28W	-20 °C ~ + 75 °C	460 * 42 * 55mm	IP43