□□□□ □□□ □□□ - OMNI □□□ □□□ □□ □□□□

□□□□ □□□□ □□ □□□ □□□□□ IoT □□ □□ □□ □□ □□□ □□ □□□ □□□□□□.

- □□□□ □□□- □□□□ □□□□ □□ □ 180 ° □□ □□□□ □□ □□□, □□ □□ □□ □□ □□□ □□ □□ □□□□ □□ □□ □□.
- □□□□□-□ □□□ □□ □□□ □□□ □□□□□ □□ □□ □□□ □□□□ □□□□. 20 □□ □□ □□ □□ □□□ □□□□ □ □□□□ □□□ □□ □□ □□ □□□ □□□ □□ □□ □□ □□□ □□ □ □ □□□□.
- □□□□ □□□ □□ **quality**- □□ □ □□ □□ IP67 □□□ □□, OMNI □□ □□ □□ □□□ □□□ □□ □□ □□ □ □□ □□□ □□□ □□□□ □□ □ □□□ □□□ □□□ □□□□□.
- □□□ □□□ **arm**- □□ □□ □□□□□ □□ □ □□□ □□ □□□□ □□□□□□ □□ □□□ □□□ □ □□□□ □ □□□ □ □□□□.
- □□□□ □□□ **design**- □□□ □□□□ □□ □□□, □□□ □□ □□ □□□ □□□ □ □□ □□ □□□ □□ □□□□ □□ □□□ □□□□□ □□□□.

Unibody Aluminum
Alloy Housing
180°
Smart Anti-Crash Parking Lock
Heavy-Duty
Heat-Resistant
Steel
5-Ton Load Capacity, Anti-Deformation
IP67
Waterproof

24GHz Microwave Sensor
Millimeter-Level Detection · 24/7 Standby
Smart Parking Lock: Auto-Down/Auto-Up
MLB 060

Auto-Reset When Obstructed

Anti-Collision Auto-Reverse:
Returns to Open Position if
Obstruction Detected During Rising

Motorized Remote Lifting - No Need to Get Off The Car

Encrypted 1-to-1 Signal – No Interference,
Effortless Control

Power Supply Method of Parking Lock

Dry Battery

4× D-Cell Batteries

- No Charging Required
- Easy to Replace

Lead-Acid Battery

- 6V7AH/6V12AH
- Rechargeable

Li-ion Battery

- Requires Separate Purchase
- Rechargeable
- Long-lasting Battery

Mounting Position

Built-in Expansion Bolts - Key-Only Access for Anti-Theft

Expansion Bolt Installation

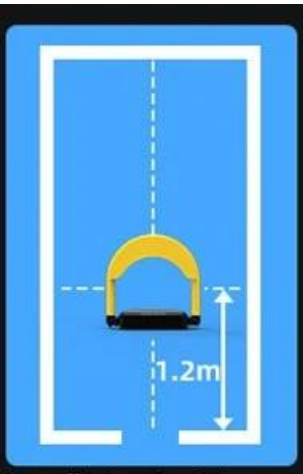

Installation Position Diagram

Parking Lock Model Overview

Bluetooth Communication

Connection Port	Bluetooth
Network Module	None
Pair with Remote	Have

4G Parking Lock

Connection Port	Bluetooth TCP
Network Module	Have
Powered by 4G LTE Technology	
Pair with Remote	None

NB-IoT Parking Lock

Connection Port	Bluetooth TCP
Network Module	Have
Energy-efficient NB-IoT Connectivity	
Pair with Remote	None

RS-485 Communication

Connection Port	485/ Bluetooth
Network Module	None
Pair with Remote	None