


DSW100 □□ □□ □□ □□□□



Pull arm(alternative) inward opening

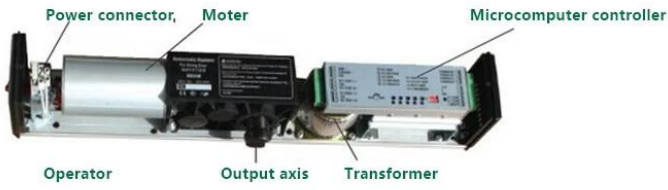

Push arm(alternative) outward opening

Technical Parameters

□□	220V ± 10 %
□□ □□	50W
□□ □□	3 ~ 7 □ / 90
□□ □□	1 ~ 30 □ □□ □□
□□ □□ □□ □□	450mm
□ □□	□□ 600mm / □□ 1,200mm
□□ □□	120°
□□ □□	-20 °C ~ + 50 °C
□□ □□	6.5KGS
□□ □□	IP12D
□□ □□	L515 * H95 * W90mm

Product Features

- * □□ □□ □□ □□ □□ □□.
- * □□ □□ □□ □□ □□.
- * □□ □□ □□ □□ □□.
- * □□ / □□ □□ □□, □□ □□ □□ □□ □□ □□ □□.
- * □□ □□ □□ □□ □□ □□.