




- Model Number: CW68-S300N/400mm
- Material: PC+ABS+POM
- Color: Silver
- Size: 460*42*56mm
- Rated Voltage: 24.0V
- Working voltage: AC100-240V
- Certificate: ROHS, CE, FCC



ELECTRIC CHAIN WINDOW OPENER

Electric Chain Motor is widely used for motorized sliding sash, casement and skylight window etc, particular for high place hard to manual operation, works with all kinds of remote control and realize automation operation.

STRUCTURE EXPLANATION

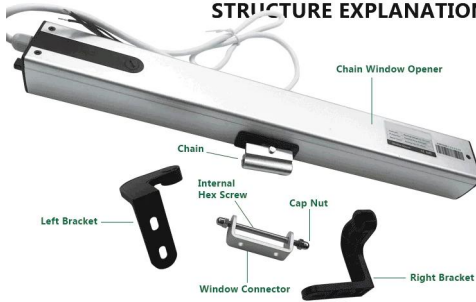

DIMENSIONS




CENTER PIVOTED WINDOW



HOPPER WINDOW

Wide voltage 100-240V AC power supply; Apply to windows mounted in high, where people hard to reach. You could easily operate the windows with manual switch. It's safe and reliable.

Wide Voltage 100-240V AC power supply; Apply to windows are mounted in high position, where people hard to reach. You could also use wireless remote control to operate the windows with an external receiver. It's easy and smart, which meets more demands.



Features

1. Breedstroom 100-240V wisselstroominput, geschikt voor alle verschillende verzoeken van het land.
2. Stel de reis in door de knop in te stellen; de maximale slag kan 400 mm bereiken.
3. Ben op klein venster van toepassing, onderaan aan 470mm vensters
4. Lange levensduur, meer dan 10000 keer open en dicht
5. De kettingmaterialen gebruiken dubbele lagen roestvrij metaal. Kwaliteit stabiel en soepel lopend.
6. Aluminium behuizing met zandstralenbehandeling; het deksel en de beugels zijn gegoten gietstukken van zinklegeringen.
7. Twee ABS-houders met vlamweerstand en de POM-schuifgeleider maken de motor stiller en veiliger.
8. Eenvoudig te installeren en neer te halen.

Parameters

Modelnr.	Nominale spanning	Push / Pull Force	Snelheid	Running Trip	Vensterbreedte	Nominaal vermogen	Temp	Grootte	IP-klasse
CW68-S300N / 400mm	100-240VAC	300N / 300N	10mm / s	100 ~ 400mm	0,47 ~ 1.5m	28W	-20 °C ~ +75 °C	460 * 42 * 55mm	IP43