




- ☑ Model Number: CW68-S300N/400mm
- ☑ Material: PC+ABS+POM
- ☑ Color: Silver
- ☑ Size: 460*42*56mm
- ☑ Rated Voltage: 24.0V
- ☑ Working voltage: AC100-240V
- ☑ Certificate: ROHS, CE, FCC



ELECTRIC CHAIN WINDOW OPENER

Electric Chain Motor is widely used for motorized sliding sash, casement and skylight window etc, particular for high place hard to manual operation, works with all kinds of remote control and realize automation operation.

STRUCTURE EXPLANATION

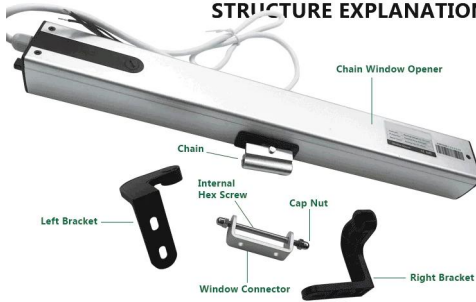

DIMENSIONS




CENTER PIVOTED WINDOW



HOPPER WINDOW

Wide voltage 100-240V AC power supply; Apply to windows mounted in high, where people hard to reach. You could easily operate the windows with manual switch. It's safe and reliable.

Wide Voltage 100-240V AC power supply; Apply to windows are mounted in high position, where people hard to reach. You could also use wireless remote control to operate the windows with an external receiver. It's easy and smart, which meets more demands.



Features

1. Wide voltage 100-240V AC power input, suitable for all country's different requests.
2. Adjust the journey by adjusting knob; the Maximum stroke could reach 400mm.
3. Apply to small size window, down to 470mm windows
4. Long service life, more than 10000 times open and close
5. The chain materials use double layers stainless metal. Quality stable and smooth running.
6. Aluminum housing with sand blast treatment; the cover and brackets are zinc alloy die castings.
7. Two flame resistance ABS holders and the POM sliding guide make the motor more silent and safer.
8. Easy to install and take down.

Parameters

| Model No. | Rated Voltage | Push/Pull Force | Speed | Running Trip | Window Width | Rated Power | Temp | Size | IP Class |
|------------------|---------------|-----------------|--------|--------------|--------------|-------------|-------------|-------------|----------|
| CW68-S300N/400mm | 100-240VAC | 300N/300N | 10mm/s | 100□400mm | 0.47□1.5m | 28W | -20°C□+75°C | 460*42*55mm | IP43 |