




- ☑ Model Number: CW68-S300N/400mm
- ☑ Material: PC+ABS+POM
- ☑ Color: Silver
- ☑ Size: 460*42*56mm
- ☑ Rated Voltage: 24.0V
- ☑ Working voltage: AC100-240V
- ☑ Certificate: ROHS, CE, FCC



ELECTRIC CHAIN WINDOW OPENER

Electric Chain Motor is widely used for motorized sliding sash, casement and skylight window etc, particular for high place hard to manual operation, works with all kinds of remote control and realize automation operation.

STRUCTURE EXPLANATION

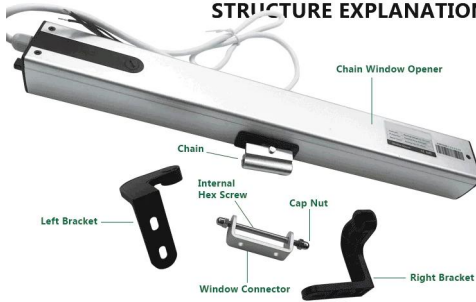

DIMENSIONS




CENTER PIVOTED WINDOW



HOPPER WINDOW

Wide voltage 100-240V AC power supply; Apply to windows mounted in high, where people hard to reach. You could easily operate the windows with manual switch. It's safe and reliable.

Wide Voltage 100-240V AC power supply; Apply to windows are mounted in high position, where people hard to reach. You could also use wireless remote control to operate the windows with an external receiver. It's easy and smart, which meets more demands.



Features

1. Entrada de alimentação de alta tensão 100-240V AC, adequada para todos os pedidos do país.
2. Ajuste a jornada ajustando o botão; O curso máximo atingiu 400 mm.
3. Aplicar na janela de tamanho pequeno, até janelas de 470 mm
4. Vida de serviço longa, mais de 10000 vezes aberto e fechado
5. Os materiais da corrente utilizam metais inoxidáveis de dupla camada. Qualidade equilibrada e suave.
6. Carcaça de alumínio com tratamento de explosão de areia; A cobertura e os suportes são peças fundidas em liga de zinco.
7. Dois suportes ABS resistentes à chama e o guia deslizante POM tornam o motor mais silencioso e seguro.
8. Fácil de instalar e derrubar.

Parameters

Modelo No.	Tensão nominal	Push / Pull Force	Rapidez	Viagem corrida	Largura da janela	Poder nominal	Temp	Tamanho	Classe IP
CW68-S300N / 400mm	100-240VAC	300N / 300N	10mm / s	100 ~ 400mm	0,47 ~ 1,5 m	28W	-20 °C ~ + 75 °C	460 * 42 * 55mm	IP43